

## Extracting Toyota Venza Bluetooth Microphone From Mirror

After removing the original mirror from the vehicle place it on a clean workspace area and perform the following steps.

1) Using a small flat head screwdriver slowly insert into microphone cap and pry up. **(Image A)**

2) Disconnect the small Molex connector from the microphone PC board and remove microphone. **(Image B)**

3) Extract the entire harness from the mirror (do not cut in half) **(Image C)**

4) Remove the overhead console and mount the microphone into the open area where the microphone was in earlier models by using hot melt glue. **(Images D & E)**

5) Connect removed harness from mirror to microphone and vehicle harness and reinstall overhead console.



Image A



Image B



Image C



Image D

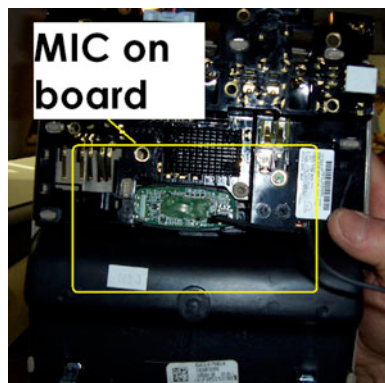


Image E